



NETBOX Axial

■ Product Description

NETBOX Axial is a built-in power and data unit in aluminium finish which closes flat against the mounted surface.

■ Product Specification

- Unit opens at 60° angle
- Cable outlet with rubber lips
- Unit sits flush with mounted surface
- Available in any length
- Customizable into various configurations
- Tool free installation
- Quick installation with the click-stop mechanism
- Plug & Play technology

■ Application Range

- Executive Desks
- Workstations
- Conference Tables
- Boardroom Tables
- Meeting Tables

■ Technical Details

- Rated for 110V to 250V and a maximum of 20A according to country specific standards
- Low concentration of heavy metal
- Material: PA6-FR
- Wiring: 3 x 1.5mm² standard; 3 x 2.5mm² upon request

Please follow local standards for electrical installation.

A. & H. Meyer GmbH
Leuchten und Büroelektrik



Fermke 8
32694 Dörentrup
Germany

T: +49 5265 9488 0
F: +49 5265 9488 11
www.ah-meyer.de

A. & H. Meyer Sdn Bhd
(528797-M)
No. 3, Jalan Astaka U8/84
Section U8, Bukit Jelutong
40150 Shah Alam, Selangor
Malaysia

T: +603 7845 7277
F: +603 7845 2155
sales@ah-meyer.com.my


Dimensions

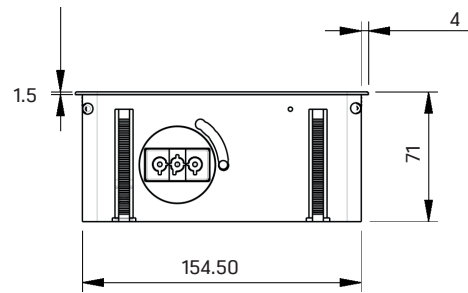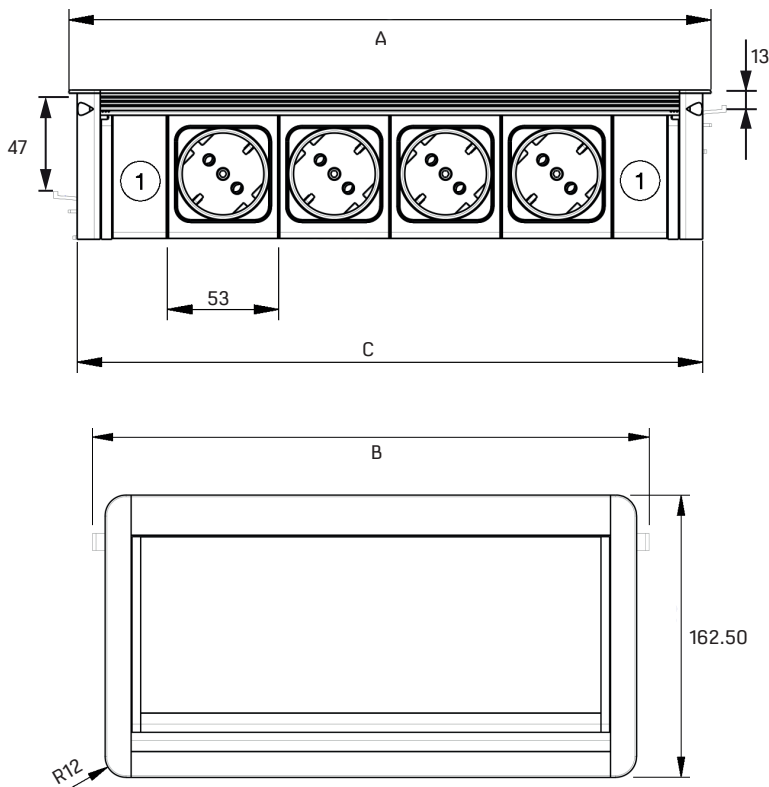


M	A	B	C
2	200	214.5	192
3	253	267.5	245
4	306	320.5	298
5	359	373.5	351
6	412	426.5	404
7	465	479.5	457
8	518	532.5	510
9	571	585.5	563
10	624	638.5	616

M = Number of Module

Cut-Out

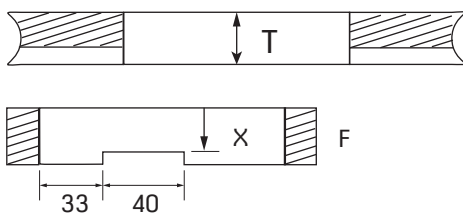

- ① = Half blanking plate
- F = Front edge section
- T = Thickness of table top
- X = T till 17mm (opening angle -60°)
- X = T till 25mm (opening angle -45°)

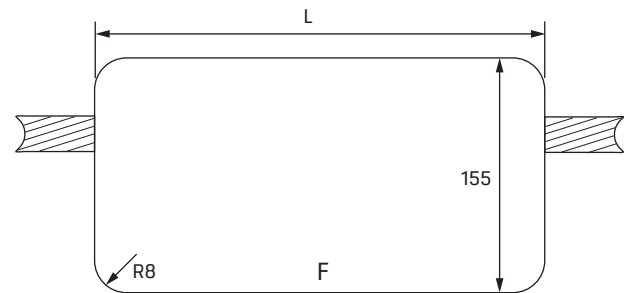

 Chamfered access slot for connectors

M	2	3	4	5	6	7
L	192.5	245.5	298.5	351.5	404.5	457.5

Standards and Approvals

Country	Malaysia	Singapore Hong Kong India	China	Australia New Zealand	Japan	GCC Countries	Kingdom of Saudi Arabia	Indonesia	Korea
Approvals / Test Institute									